

TEAMCOMM



6 full-duplex participants



Easy-View Distinct display



15+ hour operating time



Wireless range ~300 feet





USB-C charging



Side tone adjustable volume




At the start of each communication session, you will need to configure one of the transceivers as the “Master” and then connect to other transceivers simply by turning them on within 3 feet of the Master. To do this, grab any transceiver. Next, press the POWER and MENU buttons at the same time. This will put this transceiver into the “Master Mode”.

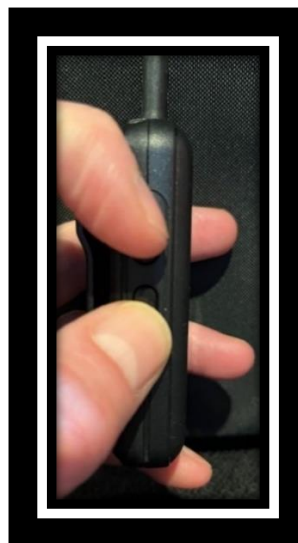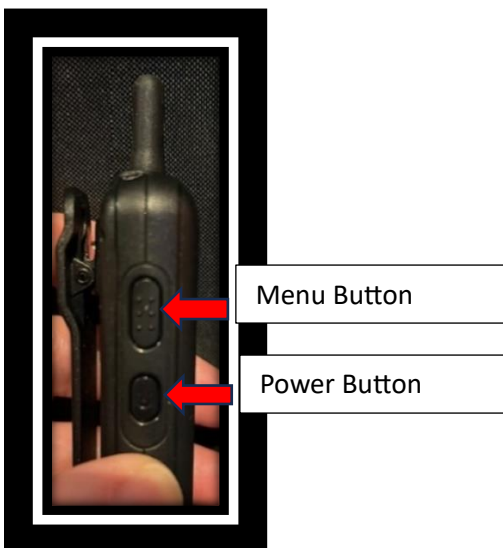

The Master mode set up gives you the options to select the channel and enter the Encoded mode. For most situations you will not need to change the channel or enter the Encoded Mode. * When in Encoded Mode the Master can control some of the Sub-Masters functions like powering them off at the end of the communication session.

Once the Master transceiver displays 01, press the MENU Button once and you should see this display.

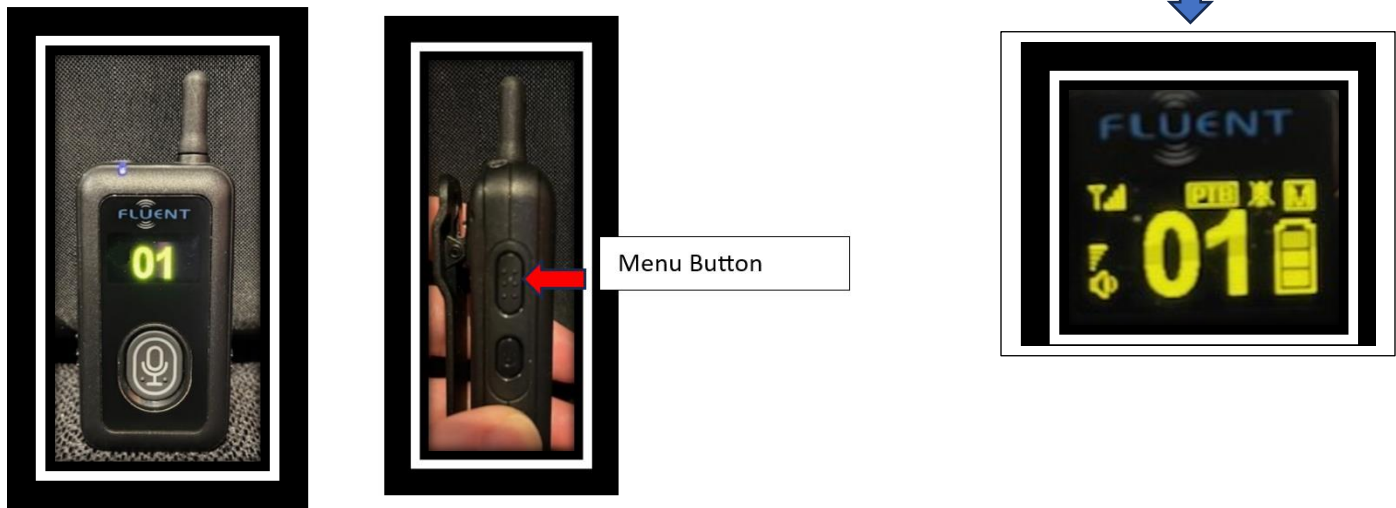

Next, power on as many of the other five transceivers that you would like to use. They will automatically pair to the MASTER Transceiver.



Your transceivers should all show Channel 01 and signal strength displayed in the upper left corner. The Master will have an “M” in the upper right corner and all the Sub-Masters will have an “S” in the upper right corner of the display. You are now ready to communicate.

To activate your Mic, press the  button. It will turn Blue when your mic is live. To mute your mic press the MIC button  and it will turn RED, meaning your mic is muted.

Although your mic is muted you will still hear everyone that has their mic live and is speaking.



RED: Your Mic is muted



Blue: Your Mic is Live

When in charger, units with RED light are charging. Blue Light indicates transceivers are fully charged.

